
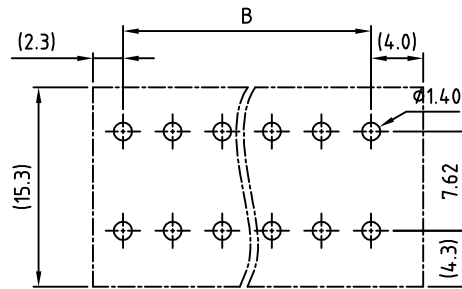
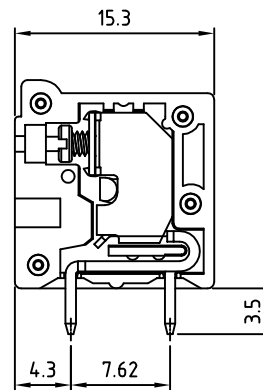


SIGN	DATE	DESCRIPTION	APPROVER
		<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>	

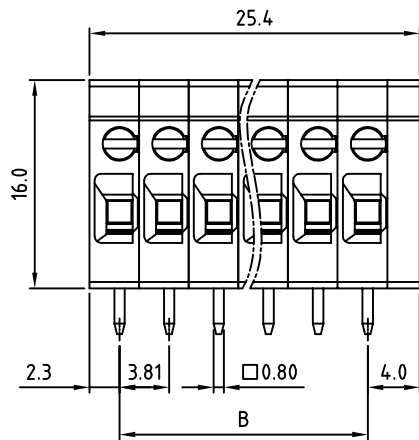

PCB Layout

- Material:
- Insulator(housing): Thermoplastic (UL94V-0)
  - Insulator(cover): Thermoplastic (UL94V-0)
  - Metal housing: Steel
  - Terminal screw: Steel Zinc plating "-" slot type.
  - Contact: Brass,Tin plated.

- Electrical: cULus
- Voltage rating: 300V
  - Current rating: 8A
  - Wire range:
    - Solid wire(AWG): 16-28
    - Stranded wire(AWG): 16-28
  - Torque: 1.7 Lb-In.
  - Screw: M2
  - Wire strip length: 8-9mm
  - Withstanding Voltage: 1.6KV
  - Operating temperature: -40°C to +115°C

RoHS Compliant

PART NUMBER:

OSTTRXX3551

No. of Poles  
 02 2 Poles  
 03 3 Poles  
 ... ..  
 24 24 Poles

COLOR  
 0: Black  
 5: Green (Standard)  
 6: Blue  
 8: Grey

POLE		2	3	4	5	6	7	8	9	10	11	12	
A		10.12	13.93	17.74	21.55	25.36	29.17	32.98	36.79	40.60	44.41	48.22	
B		3.81	7.62	11.43	15.24	19.05	22.86	26.67	30.48	34.29	38.10	41.91	
Tol.		±0.10					±0.15						
POLE		13	14	15	16	17	18	19	20	21	22	23	24
A		52.03	55.84	59.65	63.46	67.27	71.08	74.89	78.70	82.51	86.32	90.13	93.94
B		45.72	49.53	53.34	57.15	60.96	64.77	68.58	72.39	76.20	80.01	83.82	87.63
Tol.		±0.20						±0.30					



TITLE	OSTTR 3.81mm 180D Series			DWG NO.	OSTTRXX3551.DWG		
PART NO.	OSTTRXX3551			CUST NO.			
APPROVED	CHECKED	DESIGNED	DRAWN	Tolerance			
		Tony 2008.06.10	Tony 2008.06.10		UNIT: mm	X.	±0.50
					SCALE: NONE	X.X	±0.30
				SHEET: 01/01	REV.: B	X.XX	±0.10
						X°	±1°