


mat'l. code		surface ASME Y14.5 ✓		tolerance ASME Y14.5		projection MM [INCH]		product family GANGED MJACK	
ltr	ecn no	dr	date	tolerances unless otherwise specified		scale		title CAT 3 MULTIPORT STACKED 2x4 WITH SHIELD, W/O LED	
A		WL	11/04/11	angles	X.X±0.25			dwg no 10118072	
				flatness	X.XX±0.13			sheet 1 of 3 size A4	
				X*±1*	X.XXX±0.05			type CUSTOMER Drawing	
				dr	WENDY CHEN	05/03/11			
				enr	WENDY CHEN	05/03/11			
				chr	WENDY CHEN	05/03/11			
				appd	GARY HSIEH	05/03/11			
sheet index	revision sheet	A	A	A					
		1	2	3					

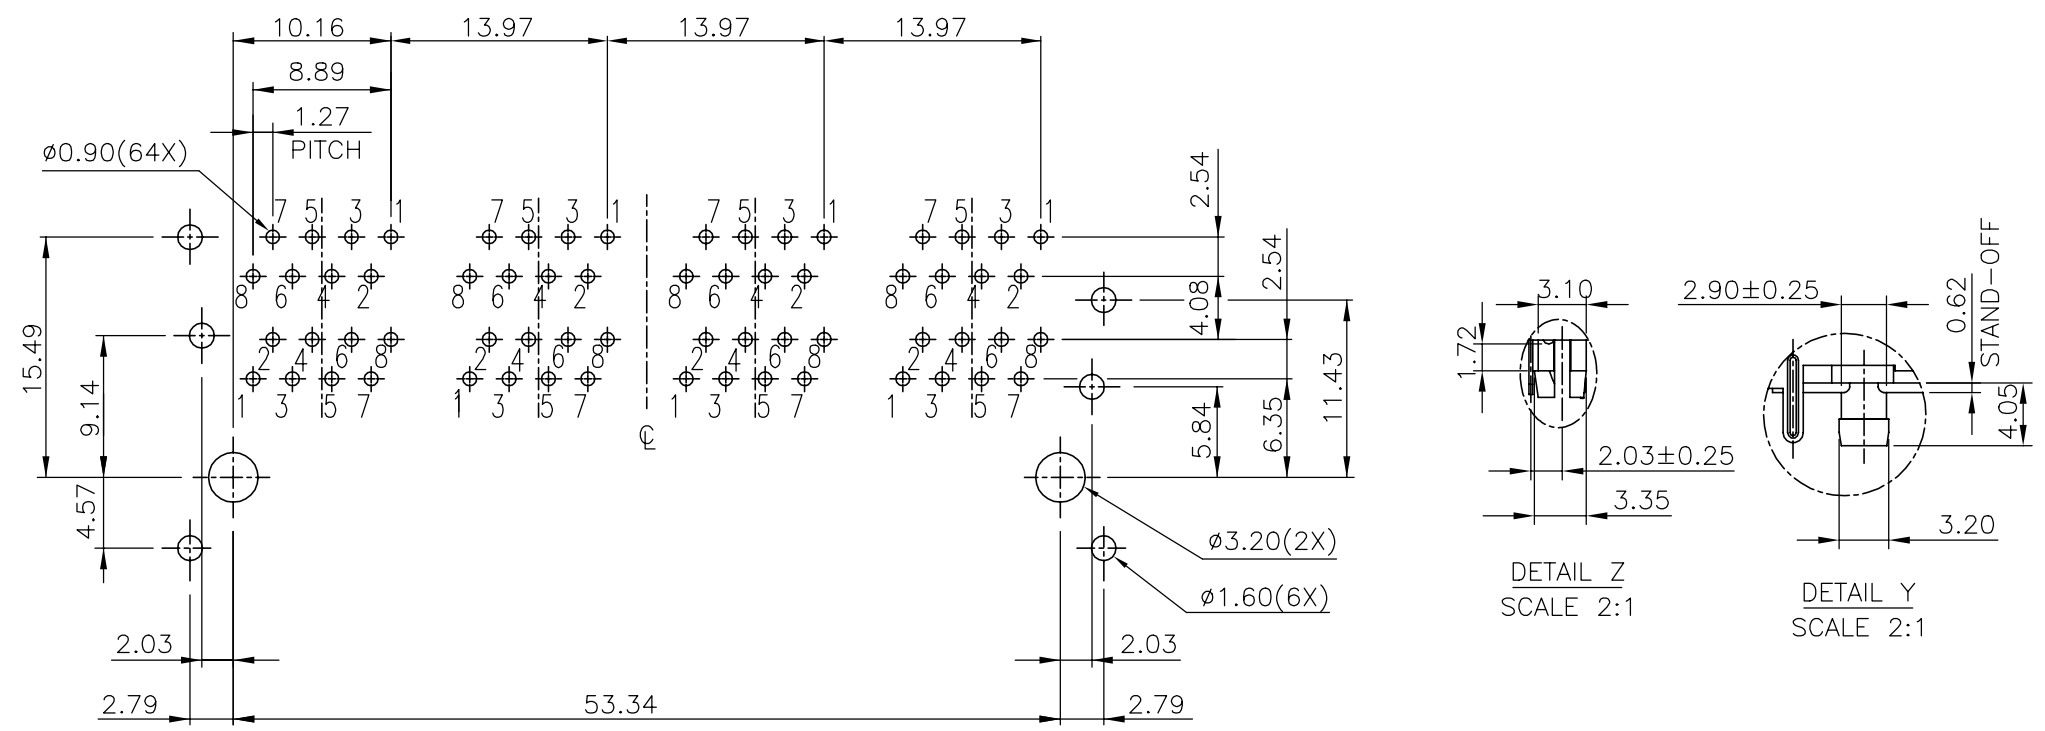

RECOMMENDED PCB LAYOUT  
RECOMMENDED PCB THICKNESS: 1.6mm  
TOLERANCE: ±0.05mm (TOP VIEW)


mat'l. code		surface ASME Y14.5 ✓		tolerance ASME Y14.5		projection MM [INCH]		product family GANGED MJACK	
ltr		ecn no		dr		date		title CAT 3 MULTIPORT STACKED 2x4 WITH SHIELD, W/O LED	
A								scale	
		angles		X.X±0.25				dwg no 10118072	
				X.XX±0.13				sheet 2 of 3 A4	
		X*±1*		X.XXX±0.05				type CUSTOMER Drawing	
		dr		WENDY CHEN		05/03/11		FCI	
		enr		WENDY CHEN		05/03/11			
		chr		WENDY CHEN		05/03/11			
		appd		GARY HSIEH		05/03/11			
sheet index		revision sheet							

NOTE:

1. MATERIAL:  
HOUSING & INNER HOUSING & COVER:  
HIGH TEMPERATURE THERMOPLASTIC, UL94V-0, COLOR: BLACK.  
CONTACTS: COPPER ALLOY.  
SHIELD: COPPER ALLOY.  
INNER SHIELD: COPPER ALLOY.
2. FINISH:  
CONTACTS: 50u" MIN. NICKEL UNDER PLATED OVER ALL.  
SELECTIVE GOLD PLATED ON CONTACT AREA,  
1u" GOLD PLATED ON SOLDER TAIL.  
SHIELD & INNER SHIELD: 20u" MIN. NICKEL OVER ALL.
3. LASER MARK FCI LOGO ON THE TOP OF SHIELD.
4. "DATE CODE" DESCRIPTION:  
XX XX  
WEEK  
YEAR (EX. : 10--2010)
5. PRODUCT PERFORMANCE PER SPEC. : GS-12-0990.
6. PACKING SPEC. : GS-14-2170.
7. THIS PRODUCT MEETS THE EUROPEAN UNION DIRECTIVE AS DESCRIBED IN GS-22-008.
8. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 5 SECONDS IN A WAVE SOLDER APPLICATION WITH A CIRCUIT BOARD.


9. PART NUMBER DESCRIPTION:

- 10118072-X X X X X X X LF
- LEAD FREE
  - 0 : RESERVED (NOT USED)
  - PACKAGING  
1 : TRAY
  - OPTIONAL BACK SHIELD TAB  
0 : WITHOUT BACK SHIELD TAB
  - OPTIONAL RIGHT / LEFT SHIELD TAB  
A : SHIELD TAB WITH INNER SHIELD  
B : SHIELD TAB WITHOUT INNER SHIELD
  - OPTIONAL PANEL GROUND  
0 : WITHOUT PANEL GROUND
  - LED COLOR  
0 : WITHOUT LED
  - CONTACT AREA PLATING  
1 : 15u" GOLD PLATING  
2 : 30u" GOLD PLATING  
5 : 1u" GOLD FLASH PLATING



INNER SHIELD

10118072-XXXAXXXLF  
(WITH INNER SHIELD)



10118072-XXXBXXXLF  
(WITHOUT INNER SHIELD)

mat'l. code		surface ASME Y14.5 ✓	tolerance ASME Y14.5	projection ⊕	product family GANGED MJACK
ltr	ecn no	dr	date	tolerances unless otherwise specified	title CAT 3 MULTIPORT STACKED 2x4 WITH SHIELD, W/O LED
A				angles X.X±0.25 X.XX±0.13 X*±1° X.XXX±0.05	
				scale MM [INCH]	dwg no 10118072 sheet 3 of 3 size A4
				type CUSTOMER Drawing	
sheet index		revision sheet		FCI	